



Dart Aerospace Ltd.
1270 Aberdeen St
Hawkesbury, ON
K6A 1K7
Canada

Tel (613) 632-5200
Fax 613 632-5246

D350-748-201
Job Sheet 184482



Part No: D350-748-201

Job Qty: 1 ea

Part Name: Aft Crosstube AS350 / AS355



Part Weight: 0 lbs

Status: New

Priority: Medium

Job Created: 10/10/18

Job Tracking No:

Due Date: 10/12/18

Created By: Jesse White

Type: SOLD

Description:

Note: DWG REV H IPP Rev: A New Issue 06-07-05 JLM IPP Rev: B Update qty of MS21042L5 06-09-12 KJ IPP Rev C Combined manufacturing 08.04.02 EC verified: DD IPP Rev: D 08-06-24 revD as per dwg DD verified: EC IPP Rev: E 08.12.11 Step17 was step 21 KJ Verified: EC IPP Rev: F 10.08.04 added QSI010 4.3 DD verf: EC IPP REV: G ADD UNDER BEND COMMENT 12-05-28 JLM IPP REV: H 12.11.05 as per dwg D350-748-141G DD verf: JLM IPP REV: I 15.03.19 as per dwg D350-748-241revH dd verf: jlm

Ship Via:

Bill of Materials



Dart Aerospace Ltd.
1270 Aberdeen Street
Hawkesbury, ON K6A 1K7
CANADA
TEL.: 1 613 632-5200
Email: sales@dartaero.com
www.dartaerospace.com

Container No: S119468



Part: D350-748-201

Job No: 184482

Serial No/Batch: S119468

Revision:

Inspector:

Exp Date:

Instructions: TC STC SH06-27 Issue 2 FAA STC SR02359NY 11/03/04, EASA S

P.T.O.
SCRAP

61.0

Job Routing

Op No	Operation	Qty	Start Date	Due Date	Standard		Workcenter/Supplier		Sign-off
					Setup hrs	Run Hrs	Workcenter / Supplier	Lead Time	
90	Start up Operation	1 Ea		10/12/18	0.00	0.00	Start Up Crosstubes-1		BB
110	CNC Bend Crosstubes	1 pcs		10/12/18	0.00	2.94	CNC Bend Crosstube		DP 2
120	Crosstubes	1 pcs		10/12/18	0.00	2.65	Crosstubes-2		
125	Outsource	1 pcs		10/12/18			MEI001-VC	8	
126	Packaging	1 pcs		10/12/18	0.00	0.00	Packaging2		
127	QC	1 pcs		10/12/18	0.00	0.00	QC15		
128	Crosstubes	1 pcs		10/12/18	0.00	2.65	Crosstubes-2		
130	Crosstubes	1 pcs		10/12/18	0.00	1.85	Crosstubes-2		
140	QC	1 pcs		10/12/18	0.00	0.00	QC6		
150	Outsource	1 pcs		10/12/18			CAD002-VC	8	
160	Packaging	1 pcs		10/12/18	0.00	0.00	Packaging2		
170	QC	1 pcs		10/12/18	0.00	0.00	QC6		
174	Outsource	1 pcs		10/12/18			SKY002-VC	5	
176	Packaging	1 pcs		10/12/18	0.00	0.00	Packaging2		
178	QC	1 pcs		10/12/18	0.00	0.00	QC5		
180	SprayPaint	1 pcs		10/12/18	0.00	0.88	Spray Paint		
190	QC	1 pcs		10/12/18	0.00	0.00	QC14		
200	Crosstubes	1 pcs		10/12/18	0.00	1.85	Crosstubes-2		
210	QC	1 pcs		10/12/18	0.00	0.00	QC5		
220	Packaging	1 pcs		10/12/18	0.00	0.00	Packaging1-3		
230	QC	1 pcs		10/12/18	0.00	0.00	QC4		
240	Packaging	1 pcs		10/12/18	0.00	0.00	Packaging3-1		
245	DC	1 pcs		10/12/18	0.00	0.00	DC		
250	QC21-FG	1 Ea		10/12/18	0.00	0.00	QC21		

Part Op 110 - Bend tube as per Dwg D350-748-241 using CNC bender program D350A and Folio FT _____ *****UNDER BEND
 Descriptions: .225" PER SIDE*****

120 - ****VERIFY CROSSTUBE DIMENSIONS AS PER DWG****

125 - ISSUE P/O TO METCOR: _____ AFTER BENDING: STRESS RELIEF AT 650° F ± 25° F FOR A MINIMUM OF 2 HRS AIR COOL TO AMBIENT TEMPERATURE note: crosstube made from 4130 seamless steel tube DETAIL C OF C REQUIRED

127 - ***MARK CUT LINES***

128 - CUT TUBE AT HEIGHT ON FAI SHEET

130 - 2- Drill Tube as per Dwg D350-748-241 Using DT8876 Drill Jigs, 3 -Deburr 4- Engrave Part # and Batch # as per Dwg D350-748-241 5-Remove all marks from tube within limits of D350-748-241

150 - Issue P/O: _____ Stress relief at 375degree for 5hrs Magnetic Particle Inspect per ASTM E1444 Cad Plate per AMS-QQ-P-416B, Class 1, Type 2 Embrittle relief at 375 degree for 8 hrs, Chromate Treat C of C req'd

160 - Ensure certificate of conformity is attached

174 - ISSUE P/O TO SKYSERVICE: _____

180 - 1-Prime inside and out crosstube as per QSI 005 4.2

190 - Then,Wrap in plastic bag to protect from scratches

200 - INSTALL GROUND WIRE INSERT, THEN INSERT SCREW AND WASHER 2-Install supports with Proseal 890 per D350-748-241 and QSI 015 EXP: _____ 3-Install supports clamps Using Dt8876 as per Dwg D350-748-241,Torque to 60-80 IN-LBS.

240 - Identify and pack for shipping as per PPPD350-748-201 PPP Rev: _____

245 - Photocopy bluefile & type labels per PPPD350-748-201 CHG003

Job BOM

Part / Item	Component Name	Quantity	Operation	Container
D350-748-241TRN	Crosstube Turning Detail	1 Ea (1 ea)	90-Start up Operation	
ALS4-1032-225	Rivnut	1 Ea (1 ea)	200-Crosstubes	
D3502-1	Support	2 Ea (2 ea)	200-Crosstubes	
D5123-7	Clamp Cushion	2 Ea (2 ea)	200-Crosstubes	
MS21920-20	Clamp	2 Ea (2 ea)	200-Crosstubes	
MS27039-1-10	Screw	1 Ea (1 ea)	200-Crosstubes	
NAS1149D0363J	Washer	1 Ea (1 ea)	200-Crosstubes	
AN4-41A	Bolt	8 Ea (8 ea)	220-Packaging	
AN4-6A	Bolt	16 Ea (16 ea)	220-Packaging	
AN5-32A	Bolt	4 Ea (4 ea)	220-Packaging	
D3500-1	Saddle	4 Ea (4 ea)	220-Packaging	
D3501-1	Bushing	16 Ea (16 ea)	220-Packaging	
MS21042L4	Nut	24 Ea (24 ea)	220-Packaging	
MS21042L5	Nut	4 Ea (4 ea)	220-Packaging	
NAS1149D0463J	Washer	32 Ea (32 ea)	220-Packaging	
NAS1149D0563J	Washer	8 Ea (8 ea)	220-Packaging	

Job Allocations

Operation	Component Part	Required	Inventory	Allocated
90-Start up Operation	D350-748-241TRN	1	5	0
200-Crosstubes	ALS4-1032-225	1	1,843	0
	D3502-1	2	38	0
	D5123-7	2	301	0
	MS21920-20	2	200	0
	MS27039-1-10	1	204	0
	NAS1149D0363J	1	1,829	0
220-Packaging	AN4-41A	8	567	0
	AN4-6A	16	1,198	0
	AN5-32A	4	354	0
	D3500-1	4	103	0
	D3501-1	16	547	0
	MS21042L4	24	4,639	0
	MS21042L5	4	733	0
	NAS1149D0463J	32	5,614	0
	NAS1149D0563J	8	1,414	0

Part Specifications

Specifications could not be found.

Plex 10/10/18 12:57 PM dart.white.jesse

DQA: _____ Date: _____

WORK ORDER NON-CONFORMANCE / UPDATE

QA Closed: _____ Date: _____

Work Order update only ☐

Work Order: <u>184482</u> Part No. <u>D350-743-201</u> NCR No. _____		DISPOSITION Rework ☐ Scrap ☒ Use-as-is ☐ Suspected Unapproved ☐		AGAINST DEPARTMENT/PROCESS Skid-tube ☐ Machining ☐ Thermoforming ☐ Large Fab ☐ Cross tube ☒ Small Fab ☐ Finishing ☐ Composite ☐ Water Jet ☐ Prod. Eng. Coord. ☐ Rec/Store/Packaging ☐ Supplier ☐ Engineering ☐ Quality ☐ Other ☐					
Date : <u>18-10-22</u>		Step #: <u>110</u>		QTY Effective : <u>1</u>			MRB (QSI042) Approval DAS 9 9-89 <u>18-10-22</u>		
Description Work Order Deviation <u>tube broke during bending.</u>				Disposition <u>Scrap no replace</u>				Completed By DP7 <u>18-10-22</u>	
								Lead hand / Supervisor Approval Verification DAS 9 9-89 <u>18-10-22</u>	
								QC / QA Coordinator Approval DAS 9 9-89 <u>18-10-22</u>	
Root Cause Environment ☐ Design ☐ Doc/Data ☐ Equip/Tooling ☐ Handling/Pre ☐ Material ☒ Internal Transport ☐ Tribal Knowledge ☐ LOA ☐ Substation ☐ Past Expiry Date ☐ Misidentified ☐ No Re-verification ☐ Operator ☐ Offset/Setup ☐ Supplier ☐ Training ☐ Use for Testing ☐ Poor Information ☐ Rushing ☐ Product Improvement ☐ Process Improvement ☐ Manufacturing Process ☐ Past Due ☐		FAULT CATEGORY Pressure/Forced ☐ Bending ☐ Centre Not Concentric ☐ ☒ Cracks Crimp/Kink/Ripple/Wave ☐ Cuffs ☐ Crushing ☐ Heat Treat ☐ Wave/Twist in Tube ☐ Marks/Chatter ☐ Temperature/Cure ☐ Set-up ☐ BOM/Route ☐ Broken/Damage/Defect ☐ Inspection Incomplete/Unqualified ☐ Contamination ☐ Countersink ☐ Cut Too Short ☐ Instructions Incomplete/Unclear ☐ Drill Holes ☐						Power Loss/Surge ☐ Folio/Program ☐ Grain ☐ Weld ☐ Wrong Stock Pulled ☐ Out of Sequence ☐ Off-set ☐ Mislabeled ☐ Fit/Function ☐ Misaligned/off center ☐ Positioned Wrong ☐ Outside Dimensions ☐ Over/Under tolerance ☐ Part Incorrect ☐ Part Lost/Missing ☐ Part Moved ☐ Drawing ☐ Finish ☐ Misread ☐ Turning Sequence ☐	
		OTHER : _____							

1875

1876

1877

1878

1879

1880

1881

1882

1883

1884

1885

Item	Qty -241	Part Number	Description
1	X	D350-748-241	CROSSTUBE ASSEMBLY (AS 350/355 HI AFT)
2	1	D6015-125	CROSSTUBE (OR D6018-125)
3	2	D3502-1	SUPPORT
4	2	D5123-7	CLAMP CUSHION
5	1	AELS-1032-225	INSERT
6	1	NAS1149D0363J	WASHER (OR AN960JD10)
7	2	MS21920-20	CLAMP (OR MS21920-21/-22, PER DART SPEC. M-MS21920-21/-22)
8	1	MS27039-1-10	SCREW
9	A/R	PROSEAL 890 B-2	SEALANT, AMS-S-8802 CLASS B-2

GENERAL NOTES:

- MATERIAL: MANUFACTURED FROM D6015-125 OR D6018-125
FINISHED LENGTH AFTER TURNING = 124.70±0.06 (AFTER BENDING/TRIMMING = 122.70 REF)
- FINISH: MAGNETIC PARTICLE INSPECT PER DART QSI 038 4.2
CADMIUM PLATE PER AMS-QQ-P-416B, CLASS 1, TYPE II
PRIME INSIDE AND OUTSIDE PER DART QSI 005 4.2
PAINT OUTSIDE PER DART QSI 005 4.2
- TOLERANCE: PER DART QSI 018 UNLESS OTHERWISE NOTED.
WALL THICKNESS ECCENTRICITY PER DART QSI 038 7.2
MIN. ALLOWABLE WALL IS -0.020 FROM NOMINAL
- UNITS: INCHES UNLESS OTHERWISE NOTED.
- BREAK SHARP EDGES: 0.005 TO 0.010 MAX.
- IDENTIFICATION: DART PART NUMBER "D350-748-241" AND BATCH NUMBER ON INSIDE OF CUFF
PER DART QSI 044 6.4 (VIBRATING STYLUS)
- WEIGHT: 29.85 lbs
- PART IS SYMMETRIC ABOUT CENTERLINE, EXCEPT FOR Ø0.297 HOLE.
- EXTREME CARE MUST BE TAKEN TO PROTECT THE OUTSIDE SURFACE OF THE TUBE. THE OUTSIDE SURFACE MUST BE SMOOTH AND FREE FROM SURFACE DEFECTS SUCH AS SCRATCHES, NICKS, OR DENTS. DEFECTS UP TO 0.005" MAY BE BLENDED OUT LONGITUDINALLY. CIRCUMFERENTIAL GRIND MARKS ARE UNACCEPTABLE. WHEN DRILLING HOLES EXTREME CARE MUST BE TAKEN AND CAREFUL DEBURRING PERFORMED TO ENSURE A CLEAN HOLE WITH NO CRACKING/CHIPPING/GROOVES.

TURNING

- BLEND OUT ALL EDGES FROM MACHINING LONGITUDINALLY, TRANSITION SHOULD BE SMOOTH. NOTE: ALL HOLES ARE DRILLED AFTER BENDING.
- HEAT TREAT TO MIN. 180 KSI PER MIL-T-6736 OR AMS2759/1E AFTER TURNING. ACCEPTABLE TO VERIFY TENSILE STRENGTH BY HARDNESS TEST PER ASTM E18 TO 40-45 HRC.

BENDING

- ALL DIMENSIONS FOR BENT TUBE ARE POST STRESS RELIEF
- BEND PROGRESSIVELY WITH A MINIMUM OF 7 PASSES PER SIDE. MAXIMUM TUBE FLATTENING DUE TO BENDING IS 6% BASED ON O.D. ON TOP HALF OF BEND, AND 8% ON BOTTOM HALF OF BEND.
- MAX AMPLITUDE OF RIPPING ALONG BENT PORTION OF THE TUBE IS 0.030 (ZN A1-3)
- AFTER BENDING, STRESS RELIEVE TUBE AT 650°F ±0.25°F FOR A MINIMUM OF 2 HRS AND ALLOW TO COOL TO AMBIENT TEMPERATURE (REF AMS2759/1E).
- MAX TWIST AFTER STRESS RELIEF: WITH TUBE LAYED FLAT ON SURFACE, THE DIFFERENCE BETWEEN CUFF HEIGHTS FROM THE SURFACE MAY BE NO LARGER THAN 0.38 (ZN C1-3).

ASSEMBLY

- TO INSTALL D3502-1 SUPPORT: ABRABE MATING SURFACE OF SUPPORT AND CROSSTUBE WITH 180-GRIT SANDPAPER AND REMOVE RESIDUE WITH MEK (OR EQUIVALENT). APPLY A 0.02" TO 0.05" THICK LAYER OF PROSEAL 890 CLASS B-2 (OR AMS-S-8802 CLASS B-2) SEALANT TO MATING SURFACE OF SUPPORT.
- TORQUE CLAMPS 60 TO 80 IN-LB. ENSURE AT LEAST 1.5 THREADS SHOWING IN SAFETY AND THAT NUT HAS NOT BOTTOMED-OUT AFTER TORQUING. PRIOR TO PACKAGING, RE-CHECK TORQUE ON CLAMPS AFTER PROSEAL 890 SEALANT HAS CURED FOR 72 HOURS.

RELEASED

2015 MAR 18

47 ECA 15-547

H	D5123-7 WAS D3595-083-396, MS21920-20 WAS -22, ALLOWABLE CRUSHING NOW 8% WAS 7%, 14.00 WAS 14.37 (D5-2), 12.32 WAS 12.89 (D5-3)	CP	15.02.25
G	RMV ABRASION STRIP, SUPPORT NOW W/ PROSEAL & CUSHION, ADD STRESS RELIEF, LONGER CUFF, NOW TRIM'D AFTER BEND, ADD WALL DIMS & UPDATE TOL	CP	12.08.12
F	ADD HRC TEST OPTION (B8-1) PER PAR 09-040, ADD TWIST LIMIT (A8-1, C1-3), ADD D6015-125 OPTION (C8-1), STOCK DIM NOW MACHINED (D1-4)	CP	10.11.23
E	REVISE GENERAL NOTES: UPDATE TO CURRENT STANDARDS; RELOCATED FLAG #6 PER PAR 08-046 (ZN A8-3); ADD TOLERANCES (ZN C8-3, D2-3)	RF	09.09.30
D	MAG. PARTICLE AND CAD PLATE AS MFD.	CP	06.10.31
C	ADD CAD PLATING	CP	06.08.14
B	ADD D6018-125 & PRIME AND PAINT	CP	06.06.30
A	NEW ISSUE	CP	06.03.31
REV.	DESCRIPTION	BY	DATE
DESIGN			
DRAWN			
CHECKED			
MFG. APPR.			
APPROVED			
DE APPR.			
DATE	15.02.25		

DART AEROSPACE LTD
HAWKESBURY, ONTARIO, CANADA


DRAWING NO. REV. H
D350-748-241 SHEET 1 OF 4
TITLE SCALE
CROSSTUBE (AS 350/355 HI AFT) NTS

COPYRIGHT © 2006 BY DART AEROSPACE LTD
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.


8 7 6 5 4 3 2 1

D
C
B
A

D
C
B
A

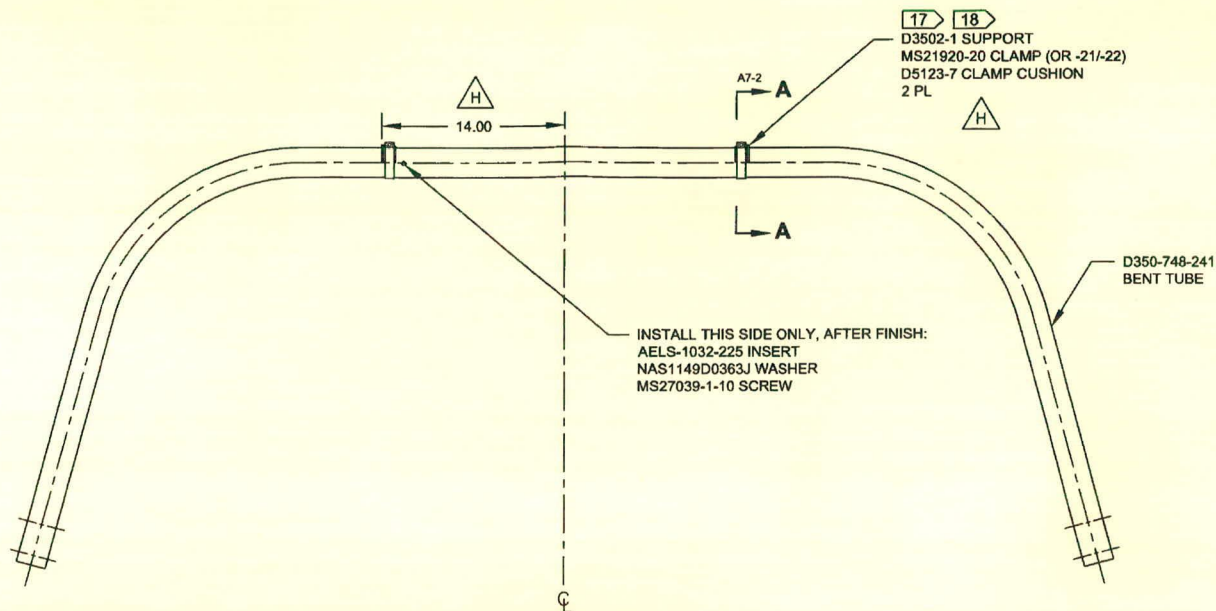

**D350-748-241
ASSEMBLY DETAIL**

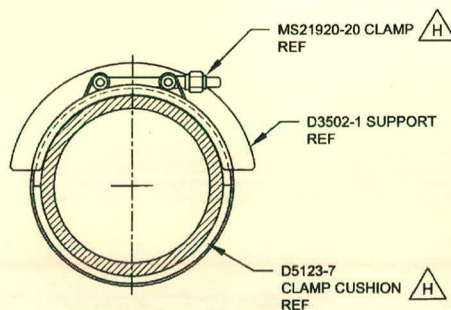



SECTION A-A D4-2
SCALE 6X

RELEASED



2015 MAR 18

DESIGN	90	DART AEROSPACE LTD	
DRAWN	90	HAWKESBURY, ONTARIO, CANADA	
CHECKED	ALS	DRAWING NO.	REV. H
MFG. APPR.	SS	D350-748-241	SHEET 2 OF 4
APPROVED	SS	TITLE	SCALE
DE APPR.	SS	CROSSTUBE (AS 350/355 HI AFT)	NTS
DATE	15.02.25	COPYRIGHT © 2006 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

8 7 6 5 4 3 2 1

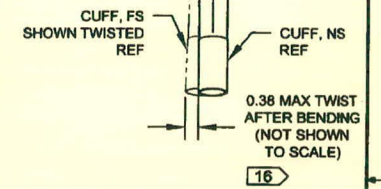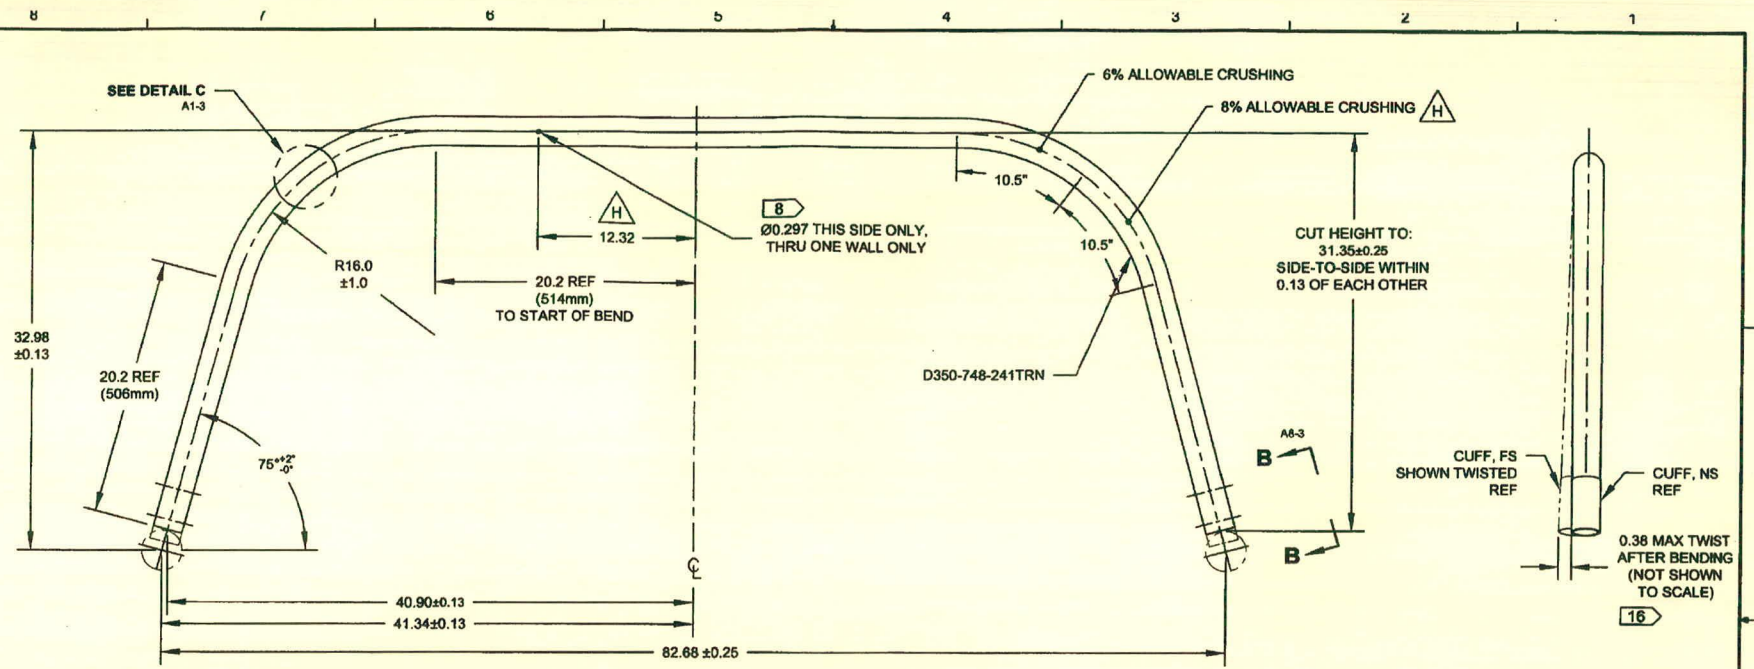


D350-748-241 BENDING AND DRILLING DETAIL 10

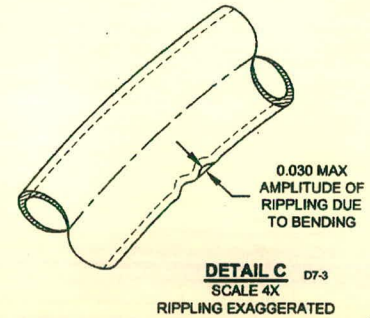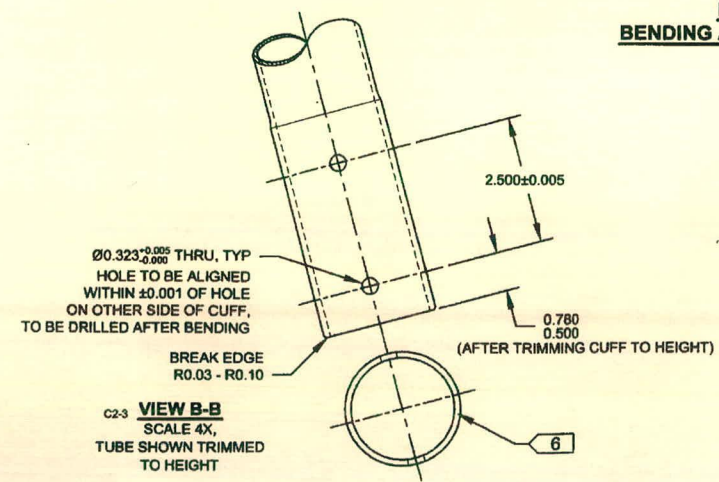

RELEASED
2015 MAR 18

DESIGN	90	DART AEROSPACE LTD	
DRAWN	90	HAWKESBURY, ONTARIO, CANADA	
CHECKED	ASS	DRAWING NO.	REV. H
MFG. APPR.		D350-748-241	SHEET 3 OF 4
APPROVED		TITLE	SCALE
DE APPR.		CROSSTUBE (AS 350/355 HI AFT)	NTS
DATE	15.02.25	COPYRIGHT © 2004 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.			


1. 1. 10
1. 1. 10

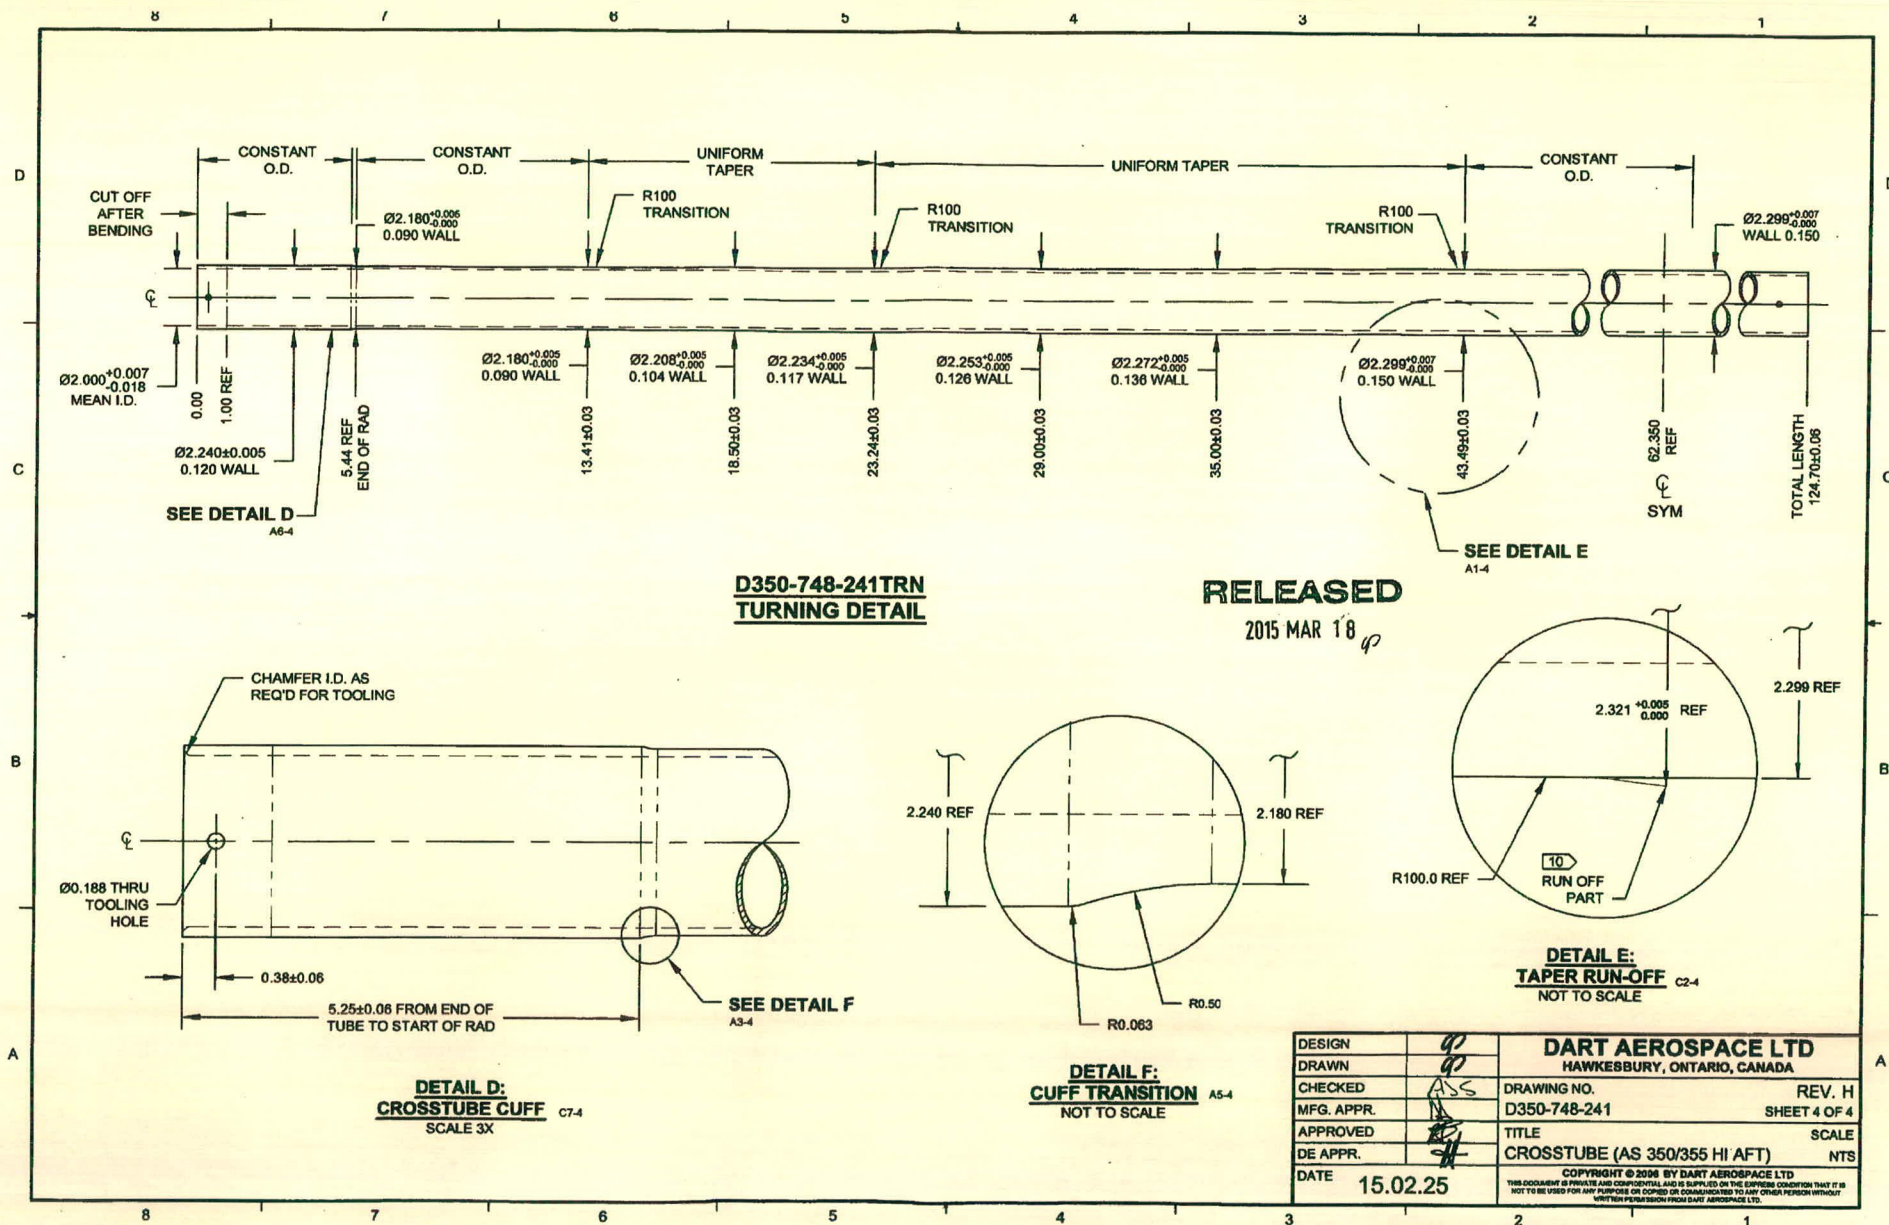

100

DART AEROSPACE LTD		Work Order:	
Description: Crosstube High Aft (AS350/355)		Part Number:	D350-748-201
Inspection Dwg: D350-748-241 Rev: H			Page 1 of 1

Required Dimension	Min	Max
Height	31.10	31.60
1/2 Span	40.77	41.03
Angle	75	77
Total Span	81.54	82.06
Bending Passes	7	--
Crushing	--	8%
Twist	--	0.38

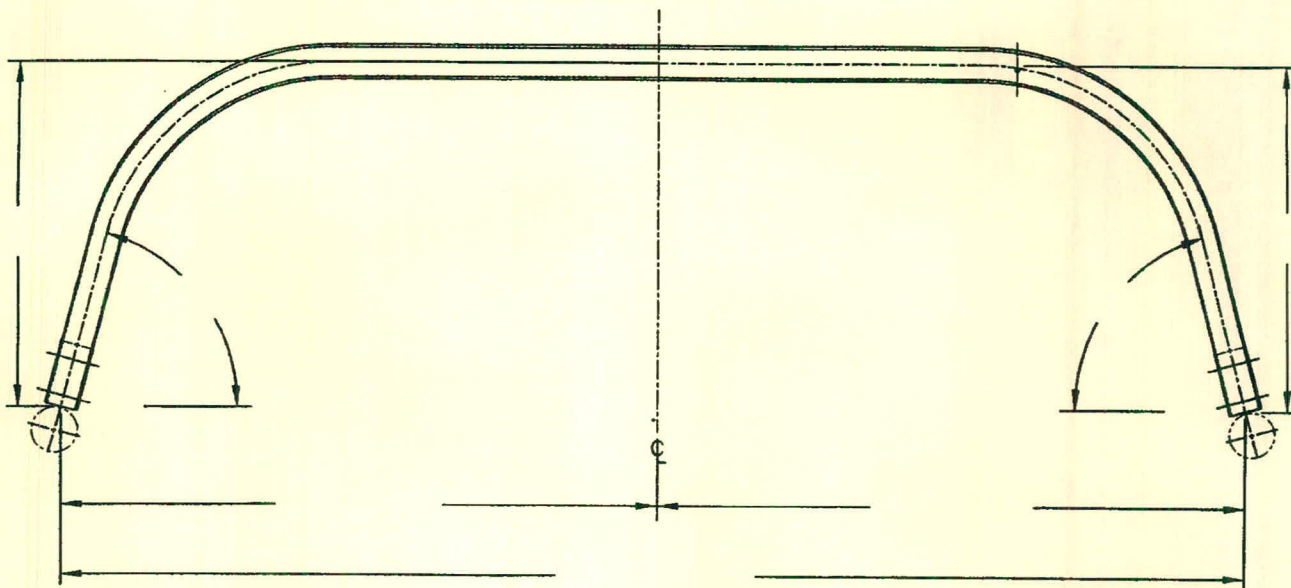


	Side A	Side B
Bending Passes		
Crushing		
Comments		

QC15 Inspection	
Date	

Rev	Date	Change	Revised by	Approved
A	07.02.06	New Issue	KJ/JM	
B	10.08.23	Dwg Rev updated	KJ	
C	12.04.16	Added bending, crushing & twist dimensions	KJ	
D	12.07.31	Dwg Rev updated	KJ	
E	13.02.27	Dwg Rev updated	KJ	
F	14.02.13	Crushing & twist dimensions revised	KJ	
G	14.11.10	Height dimension revised	KJ	
H	15.07.20	Crushing dimension revised	KJ	

DART AEROSPACE LTD		Work Order:	
Description: Crosstube High Aft (AS350/355)		Part Number:	D350-748-201
Inspection Dwg: D350-748-241 Rev: H			Page 1 of 1

Required Dimension	Min	Max
Height	31.10	31.60
1/2 Span	40.77	41.03
Angle	75	77
Total Span	81.54	82.06
Bending Passes	7	--
Crushing	--	8%
Twist	--	0.38

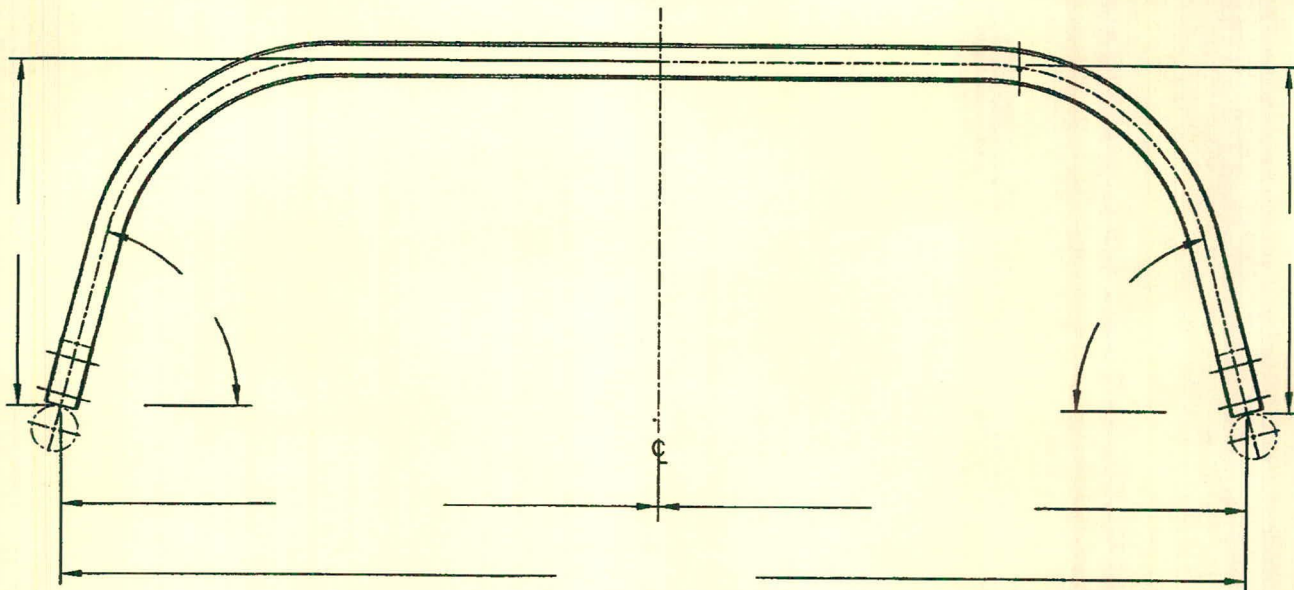

	Side A	Side B
Bending Passes		
Crushing		
Comments		

QC15 Inspection	
Date	

Rev	Date	Change	Revised by	Approved
A	07.02.06	New Issue	KJ/JM	
B	10.08.23	Dwg Rev updated	KJ	
C	12.04.16	Added bending, crushing & twist dimensions	KJ	
D	12.07.31	Dwg Rev updated	KJ	
E	13.02.27	Dwg Rev updated	KJ	
F	14.02.13	Crushing & twist dimensions revised	KJ	
G	14.11.10	Height dimension revised	KJ	
H	15.07.20	Crushing dimension revised	KJ	

